



Shrubbler® 360° Pressure Compensating



A pressure compensating drip emitter that provides a fixed diameter over a wide range of operating pressures. Gentle stream action with uniform coverage for all emitters on the same supply tube.

Features

- Pressure compensating operation maintains diameter of throw over a wide range of inlet pressures.
- Take apart for easy inspection and cleaning.
- Coloured cap for easy identification.
- UV stabilised materials for long life.
- Resistant to common agricultural chemicals & fertilisers.
- Patented design.

Applications

Pots, planter boxes, balcony, patio and landscape.


Performance Chart

Pressure (kPa)	360° ✳	
	Flow (lph)	Diameter (m)
100	24	0.3
150	29	0.4
200	33	0.4
250	36	0.4
300	38	0.4



Shrubbler® 360° PC
Spike
Inlet 4 mm

Flow Rate

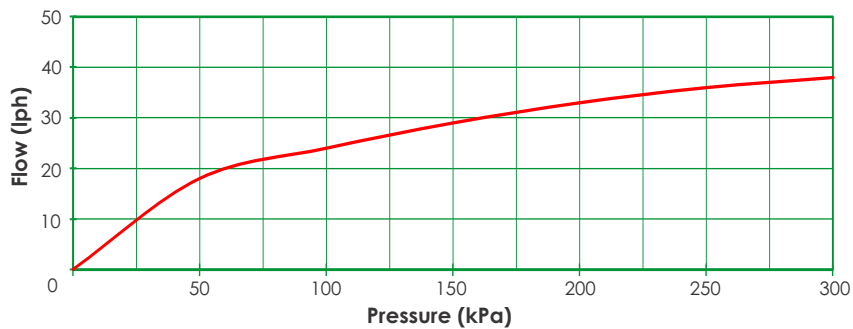

Ordering Information - Shrubbler® 360° PC

Description	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Barb 4 mm	31685	100	70	13.1
Spike	31695	25	60	8.5



Shrubbler® 360° PC
Barb 4 mm

Specifications

Dimensions Assembled		Barb	Spike
HEIGHT		25 mm	135 mm
WIDTH		20 mm	16 mm
DIAMETER		15 mm	26 mm
WEIGHT (approx.)		1.7 g	5.4 g
UV STABILISED MATERIAL	BASE CAP DIAPHRAGM	polypropylene polypropylene silicone rubber	polypropylene polypropylene silicone rubber
BASE/CONNECTION TYPE: Inlet		BARB 4 mm	BARB 4 mm

DRIPPERS

PRESSURE COMPENSATING